



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACR123U Intelligent Contactless Reader

Technical Specifications V1.08





## Table of Contents

1.0.	Introduction .....	3
2.0.	Features .....	4
3.0.	Typical Applications .....	5
4.0.	Technical Specifications .....	6



## 1.0. Introduction



The ACR123U is the USB version of the cost-effective, flexible, and intelligent contactless reader ACR123S. It can be integrated to existing point-of-sale (POS) terminals or cash registers to offer the convenience of a cashless payment system. Developed based on the 13.56 MHz contactless Radio Frequency Identification (RFID) technology, it supports any contactless card following the ISO 14443-4 standard.

Similar with its serial predecessor, the ACR123U is equipped with a large graphical LCD screen that lets merchants display messages, as well as a large tapping area with backlight, which guides customers in carrying out their payment transactions. ACR123U has a built-in ISO 7816-compliant Secure Access Module (SAM) slot, which can be used together with a SAM card.

Using either the serial or USB version of the ACR123, movement in checkout counters is faster as customers complete their payment by simply tapping their cards. This presents an opportunity to revolutionize shopping experience in a faster and more convenient payment world.



## 2.0. Features

- USB Full Speed Interface
- ARM® Cortex®-M3 32-bit Processor
- Smart Card Reader:
  - Contactless Interface:
    - Read/Write speed of up to 848 Kbps
    - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
    - Supports ISO 14443 Part 4 Type A and B cards and MIFARE Classic® series
    - Built-in anti-collision feature (only one tag is accessed at any time)
  - SAM Interface:
    - Three SAM Slots
    - Supports ISO 7816 Class A, B and C (5 V, 3 V, 1.8 V) SAM cards
- Built-in Peripherals:
  - 16 characters x 8 lines Graphical LCD (128 pixels x 64 pixels)
  - Four user-controllable LEDs (Blue, Yellow, Green, and Red)
  - User-controllable tapping region backlight (Red, Green, and Blue)
  - User-controllable speaker (Monotone indication)
- Application Programming Interface:
  - Supports PC/SC
  - Supports CT-API (through wrapper on top of PC/SC)
- USB Firmware Upgradeability
- Supports Android™ 3.1 and later<sup>1</sup>
- Compliant with the following standards:
  - ISO 14443
  - ISO 7816 Class A, B and C (SAM Slot)
  - PC/SC
  - CCID
  - CE
  - FCC
  - RoHS
  - REACH
  - VCCI (Japan)
  - KC (Korea)
  - Microsoft® WHQL

---


<sup>1</sup> Uses an ACS-defined Android Library



### **3.0. Typical Applications**

- Banking and Payment
- e-Healthcare
- Transportation
- e-Purse and Loyalty
- Contactless Mobile Payment

## 4.0. Technical Specifications

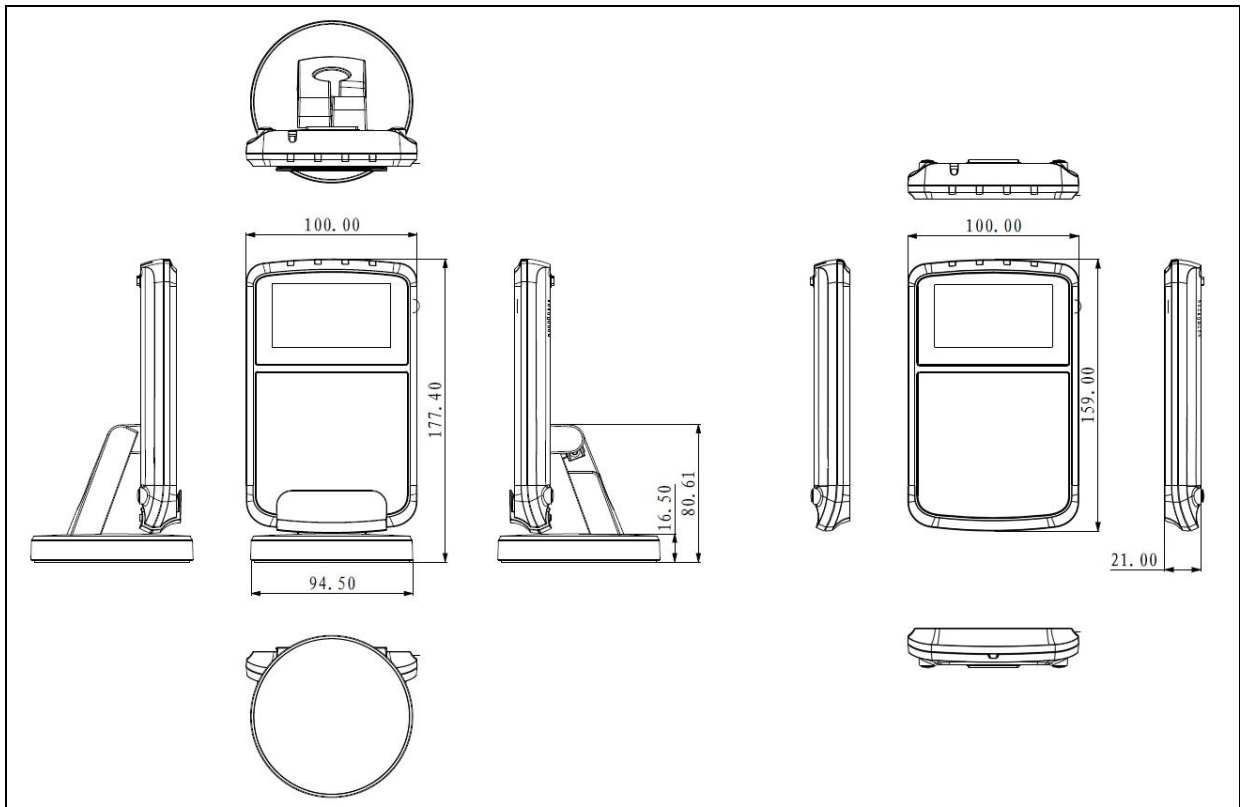

### Physical Characteristics

Dimensions .....	Main Body: 159 mm (L) x 100 mm (W) x 21 mm (H) With Stand: 177.4 mm (L) x 100.0 mm (W) x 94.5 mm (H)
Weight.....	Main Body: 281 g With Stand: 506 g
Color .....	Black

### Processor

Core .....	ARM 32-bit Cortex-M3 CPU
------------	--------------------------

### USB Host Interface

Protocol.....	USB CCID
Connector Type.....	Standard Type A
Power Source.....	From USB port
Speed.....	USB Full Speed (12 Mbps)
Supply Voltage .....	5 V
Supply Current .....	Max. 500 mA
Cable Length.....	1.5 m, Fixed

### Contactless Smart Card Interface

Standard .....	ISO 14443-4 Type A and B Parts 1-4
Protocol.....	ISO 14443 T=CL for ISO 14443-4-compliant cards T=CL Emulation for MIFARE Classic
Operating Frequency .....	13.56 MHz
Operating Distance .....	Up to 50 mm (depending on tag type)
Smart Card Read/Write Speed.....	106 Kbps, 212 Kbps, 424 Kbps, 848 Kbps
Antenna Size.....	75 mm x 75 mm

### SAM Card Interface

Number of Slots .....	3 Standard SIM-sized Card Slots
Standard .....	ISO 7816, Class A, B, C (5 V, 3 V, 1.8 V)
Protocol.....	T=0; T=1
Smart Card Read/Write Speed.....	9.6 Kbps – 344 Kbps
Card Connector Type.....	SAM Slot 0: Contact SAM Slot 1: Contact SAM Slot 2: Contact



**Built-in Peripherals**

LCD..... Graphic LCD with white backlight  
 ..... 128 pixels x 64 pixels  
 ..... Number of characters: 16 characters x 8 lines  
 LED..... 4 single-color: Blue, Yellow, Green, and Red  
 Speaker..... Audio tone indication  
 Tapping Region..... Tri-color backlight: Red, Green and Blue

**Other Features**

Security..... Tamper Switch (Internal anti-intrusion detections and protection)  
 Firmware Upgrade..... Supported  
 Real-time Clock..... Supported

**Application Programming Interface**

PC-linked mode..... PC/SC  
 ..... CT-API (through wrapper on top of PC/SC)

**Operating Conditions**

Temperature..... 0 °C – 50 °C  
 Humidity..... Max. 90% (non-condensing)  
 MTBF..... 240,000 hrs

**Certifications/Compliance**

ISO 14443, ISO 7816 (SAM Slot), PC/SC, CCID, CE, FCC, RoHS, REACH  
 VCCI (Japan), KC (Korea), Microsoft® WHQL

**Device Driver Operating System Support**

Windows® CE 5.0, Windows® CE 6.0, Windows® Embedded Compact 7, Windows® XP, Windows® Vista™, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10  
 Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2 Windows® 2016  
 Linux®, Mac OS®, Solaris, Android™ 3.1 and later



Android is a trademark of Google LLC. The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.  
 ARM and Cortex are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved.  
 Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
 Mac OS is a trademark of Apple Inc., registered in the U.S. and other countries.  
 Microsoft, Windows, and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.  
 MIFARE and MIFARE Classic are registered trademarks of NXP B.V. and are used under license.